


Lightweight Aluminum MSRT Installation Tool

The easy to use Aluminum MSRT tool now complements our Flexco® SR™ Fastening System with a focus on providing a lightweight, portable application tool. The Aluminum MSRT is designed to assist splice installers in harsh working environments where heavy splicing equipment has to be moved on a regular basis.



Fast, accurate positioning of fastener strips.

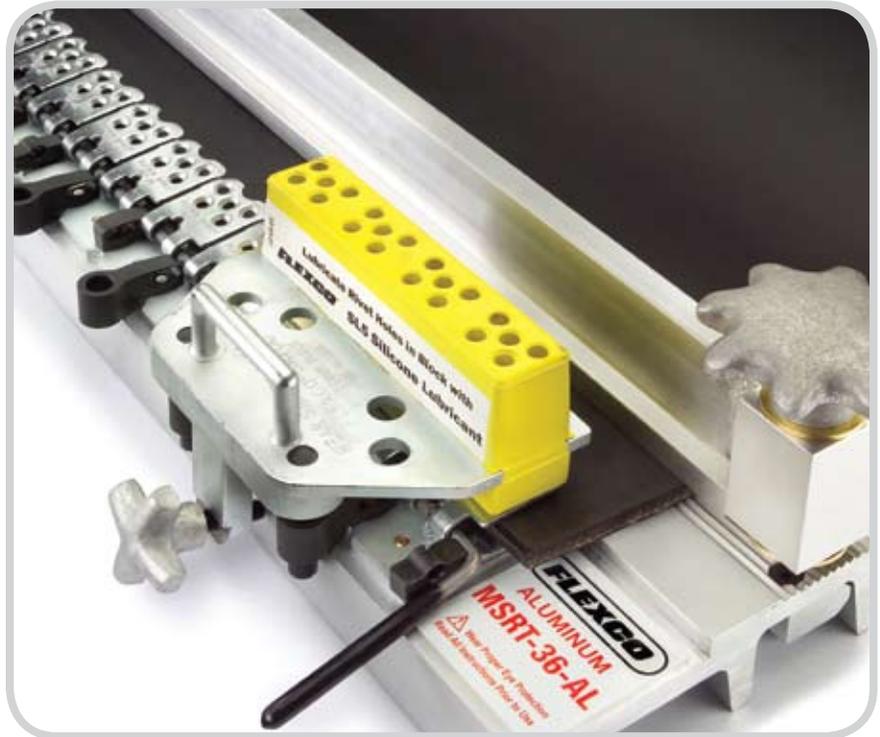

Riser plate allows for smooth transition of belt into fastener strips.

Easier.

The new scalloped design of the riser plate allows for fast, accurate alignment of fastener strips on the anvil plate.

The riser plate positions the belt for easier feed into the fastener strips.

Stronger.

Robust design of clamp bar with Acme threading provides maximum holding capabilities, especially on thick, high tension belts where a safe, strong hold is required.

Clamp bar and riser plate have been designed with serrated grips for more secure clamping and operator efficiency.

Faster.

Use Rapid Loader™ Collated Rivet Strips to load 20 rivets at one time for reduced installation time and increased operator efficiency.

Smarter.

Features and Benefits



Specially machined Scalloped Edge™ on riser plate allows fasteners to nest securely for accurate alignment of fasteners.



Heavier duty clamping methods with Acme threading to speed clamping time and ensure maximum holding ability even on thick, high tension belting.



Easy installation of rivets with Rapid Loader™ Collated Rivet strips. Load the entire guide block with one strip of collated rivets.

FLEXCO® SR™ RIVET HINGED Installation

Aluminum MSRT, MSRT8 & MSRT9 Multiple Rivet Driving Tools

Designed for ease-of-use and portability to make multiple rivet driving simple and fast. The Aluminum MSRT tools hold the belt, fastener strip, and guide blocks securely in place allowing for a low profile, even tension finished splice. The Aluminum MSRT Applicator includes two SR700 Multiple Guide Blocks, two SR759 Multiple Drive Rods, two 4 lb. Hammers, Lubricant, and one Canvas Carry Bag.



Patent Pending

Ordering Information			
Aluminum MSRT Applicator Complete			
Belt Width		Ordering Number	Item Code
in.	mm		
30	750	MSRT-30-AL	40771
36	900	MSRT-36-AL	40773
42	1050	MSRT-42-AL	40775
48	1200	MSRT-48-AL	40776
60	1500	MSRT-60-AL	40782
72	1800	MSRT-72-AL	40783
84	2130	MSRT-84-AL	40784
96	2430	MSRT-96-AL	40785
Aluminum MSRT8 Applicator Complete			
48	1200	MSRT8-48-AL	41115
60	1500	MSRT8-60-AL	41116
72	1800	MSRT8-72-AL	41117
84	2130	MSRT8-84-AL	41118
96	2430	MSRT8-96-AL	41119
Aluminum MSRT9 Applicator Complete			
48	1200	MSRT9-48-AL	41812
60	1500	MSRT9-60-AL	41813
72	1800	MSRT9-72-AL	41814
84	2130	MSRT9-84-AL	41815

Aluminum Content		
Aluminum Alloy Type	Percent	
	Mg Magnesium	Ti Titanium
5356	5.5	0.2
6005	0.6	0.1
6061	1.0	0.0
7075	2.5	0.0



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 U.S.A.
Telephone: (630)-971-0150 • Fax: (630)-971-1180 • E-mail: info@flexco.com • Web: www.flexco.com

Australia: 61-2-9680-3322 • China: 86-21-33528388 • England: 44-1274-600-942
Germany: 49-7428-9406-0 • Mexico: 52-55-5674-5326 • South Africa: 27-11-608-4180

©2008 Flexible Steel Lacing Company. Flexco® is a registered trademark. 02/08-5. For Reorder: X2089

